
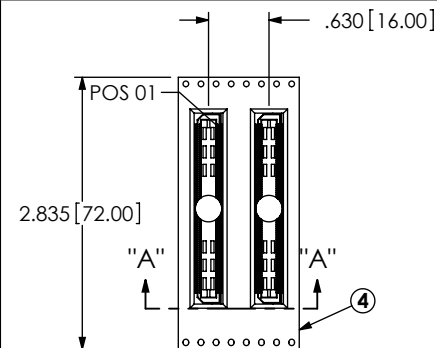


REVISION


0	TW	L MURDACA
3/20/2014	ECN-223642	
ISSUE FOR REVIEW		

NOTES:

1. STANDARD PART SET UP FOR TRACEABILITY.
2. $\langle \text{CX-XX.XX} \rangle$ REPRESENTS A CRITICAL DIMENSION.
3. MAXIMUM VARIANCE OF .002[.05].
4. MINIMUM PUSHOUT FORCE: 6 OZ.
5. LIKE PART #: BTH-090-01-L-D-A-K-TR
6. PARTS TO BE PACKAGED IN TAPE & REEL.



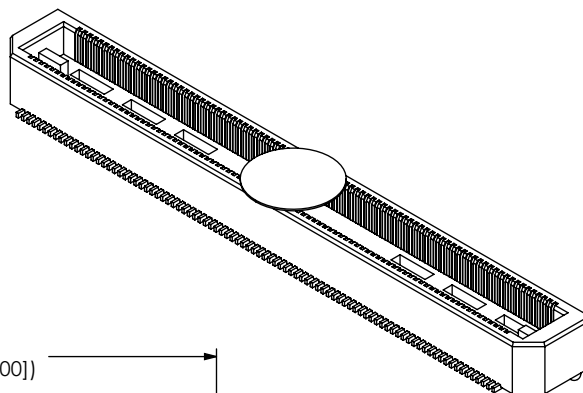


USER DIRECTION OF UN-REELING →
POCKET NOT DETAILED



SECTION "A"- "A"
SCALE 1 : 2

PACKAGING VIEW

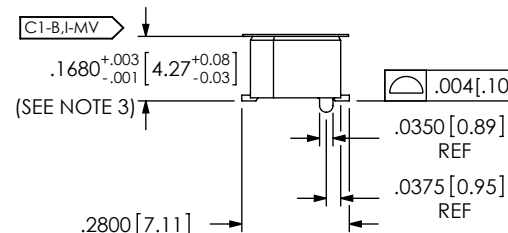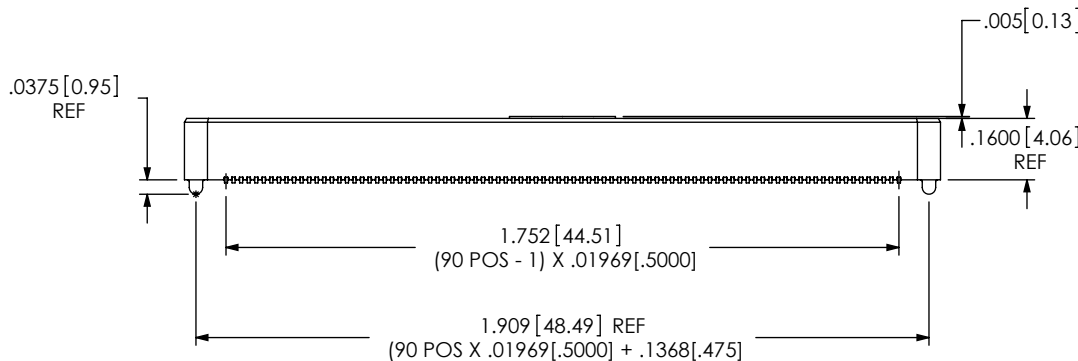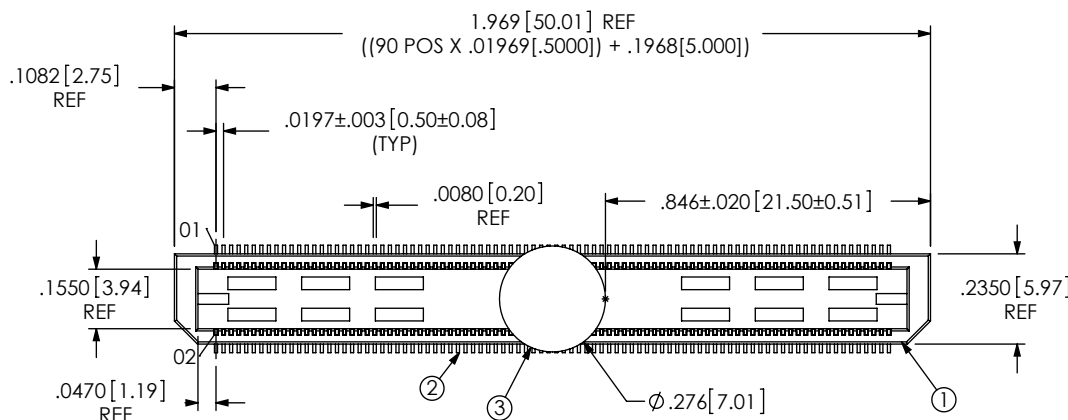


NOT RELEASED FOR PRODUCTION
USE FOR QUOTING, PRELIMINARY DESIGN, PROTOTYPING AND INFORMATIONAL PURPOSES ONLY

DATE:	DATE:
COMPANY:	COMPANY:
CUSTOMER SIGNATURE	CUSTOMER SIGNATURE
PRINTED NAME	PRINTED NAME
PHONE No:	PHONE No:
FAX No:	FAX No:

ITEM NO.	PART NUMBER	QUANTITY	MATERIAL
1	BTH-090-01-D-A	1.0000	VECTRA E130i, COLOR: BLACK
2	T-1S39-01-L	180.00	PHOS BRONZE, 510 SPRING TEMPER
3	K-DOT-.276-.375-.005	1.0000	POLYIMIDE FILM
4	CT-BTH001MS	.00235	CONDUCTIVE POLYMER

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
DECIMALS ANGLES
.XX: ±.01 [.3] 2°
.XXX: ±.005 [.13]
.XXXX: ±.0020 [.051]

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:
.5MM DOUBLE ROW TERMINAL ASSEMBLY

DWG. NO. REF-177863-03

BY: T WHELAN 03/20/14 SHEET 1 OF 1

DO NOT SCALE DRAWING SHEET SCALE: 2:1
PLATING:
CONTACT AREA: .000010 MIN GOLD OVER .000050-.000150 NICKEL
REMAINDER: .000150-.000250 TIN OVER .000050-.000150 NICKEL
F:\dwg\sw\ref\177000\REF-177863-03.SLDDRW